



A Premium Range of Bright White Accessories

**polar**™



## A Premium Range of Bright White Accessories

The Polar™ range was born out of a desire to offer a bright white, distinctly different, accessory product. Colour choice with accessories is no different to colour choice of wallpaper, paints or other internal decorations. Installers have very definite views on just which tone or shade of white is right for a particular installation.

Given the demand for a different accessory colour we took the opportunity to review all other aspects of the new range including technical features, materials used and the aesthetic appeal of the individual products. The net result is a product quite different in a number of ways to the established Click® product but still offering the same levels of high quality and competitive pricing. So confident are we of the durability and reliability of the Polar™ product that we guarantee these products against any fault in materials or manufacture for no less than 20 years.

Polar™ accessories offer added value over the basic versions of similar products offered by our competitors and include the following:

- X rated modular plate switches – Polar™ light switches are all full 10AX rated switches of modular construction. The modular design allows installers infinite flexibility in devising customised switching arrangements. In fact the diversity of the types of modules available within the Polar™ range make this a true domestic grid system.
- Full certification on all 13A socket outlets and fused connection units. These products also feature twin earth terminals as standard.
- 45A DP shower switches are upgraded to 50A as standard to accommodate the growing demand for higher rated power showers.
- The sharp, crisp lines of the Polar™ plates are complemented by gently curved rockers on all switches plus modern grey backs and matching print to switches and plates alike. The modern feel of the Polar™ range is further enhanced by amber coloured neons throughout and matching amber switchgear on the 45A accessories. All neons are flush mounted.



## Antiviral & Antibacterial Certified

Polar™ plates are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.

Polar™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses.

After a contact period of 4 hours, Polar™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

## Contents

Switches	H5
Back Boxes	H9
Power Socket Outlets	H13
Fused Connection Units	H16
Control Switches	H17
Ceiling Accessories	H20
Connection Plates	H21
Socket & Blank Plates	H22
Telephone Outlets	H24
TV & Satellite	H25
New Media™ Plates	H26
Patress Boxes	H27
Dry Lining Boxes	H28



## 25 Year Warranty

All Polar™ products are covered by our 25 year warranty against any fault in materials or manufacture experienced at any time within 25 years of the date of supply.

# Switches

**MINIGRID®**

The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For information on the full range of modules available please refer to the MiniGrid® section of this catalogue.

A comprehensive selection of light switches, control switches, 45A and 50A switches are available for wall and ceiling mounting. All light switches are 10AX rated and are of modular construction. The wide range of modules available ranges from blanks, 1 way and 2 way, through intermediates, key switches and bell push, to 20A rated double pole switch modules.


All modules are simple 1 screw fixing and therefore offer the ultimate in flexibility when devising a custom made domestic grid installation. All Polar™ modules are fully interchangeable and can be used to replace existing modules or to furnish blank plates. In addition Polar™ modules can be used with all relevant items in the Click® moulded and metal ranges.

The gentle curve on the switch rocker of the module facilitates a smooth switching operation as well as providing a modern and distinctive design feature.

## Switches


**polar™**

H5

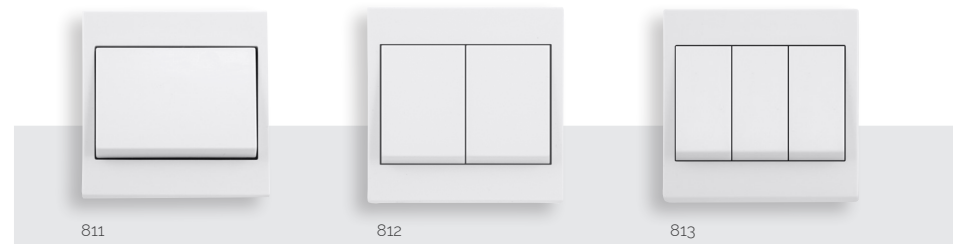

### Wide Rocker Switches - Non Modular

- PRW811** 10AX 1 Gang 2 Way Wide Rocker Switch
- PRW812** 10AX 2 Gang 2 Way Wide Rocker Switch
- PRW813** 10AX 3 Gang 2 Way Wide Rocker Switch

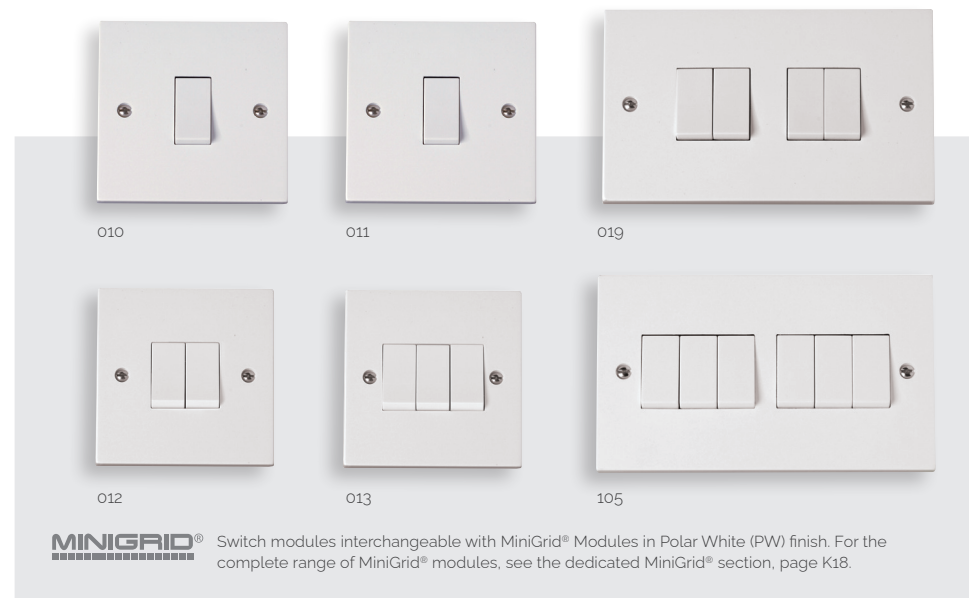

**MINIGRID®** Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page K18.

### Plates Switches - MiniGrid®

- PRW010** 10AX 1 Gang 1 Way Plate Switch
- PRW011** 10AX 1 Gang 2 Way Plate Switch
- PRW012** 10AX 2 Gang 2 Way Plate Switch
- PRW013** 10AX 3 Gang 2 Way Plate Switch
- PRW019** 10AX 4 Gang 2 Way Plate Switch
- PRW105** 10AX 6 Gang 2 Way Plate Switch

**Standards:** BS EN 60669-1  
**Back Box Depth (mm):** 16  
**Cable Size (mm²):** 4 x 1.5 or 2 x 2.5  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)

**CLICK®**

sales@scolmore.com | Call: 01827 63454 | scolmore.com



171

172



015



025

**Architrave Switches - MiniGrid®**

**PRW171** 10AX 1 Gang 2 Way Architrave Switch

**PRW172** 10AX 2 Gang 2 Way Architrave Switch

Architrave plates can be used with the dedicated architrave pattress boxes PRW175 & PRW176 or standard architrave flush boxes WA671 & WA672. They will also not accept MD070 & MD075 Switch Modules.

**Plates Switches**

**PRW015** 10AX 1 Gang 2 Way Paddle Switch

**PRW025** 10AX 1 Gang Intermediate Plate Switch

**MINIGRID®**

Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page K18.

Standards: BS EN 60669-1  
 Back Box Depth (mm): 16 171 172: 25  
 Cable Size (mm<sup>2</sup>): 4 x 1.5 or 2 x 2.5  
 Dimensions (mm): 86 (W) x 86 (H) x 11 (D) 171: 32 (W) x 86 (H) x 9.5 (D) 172: 32 (W) x 146 (W) x 9.5 (D)



401

402

403



404



406



426



432

**Unfurnished Plates - MiniGrid®**

**PRW401** 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture

**PRW402** 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures

**PRW403** 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures

**PRW404** 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures

**PRW406** 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures

**PRW426** 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

**PRW432** 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures

Utilises Polar White (PW) MiniGrid® modules.


**MINIGRID®**

Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page K18.

Standards: BS 5733  
 Back Box Depth (mm): Dependent On Module Fitted  
 Dimensions (mm): 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)




The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules. The yoke 'GR100' is required to mount the MiniGrid® modules into prior to assembling the frontplate.



612

**2 Tier Unfurnished Plates - MiniGrid®**

**PRW612** 2 Tier MiniGrid® Unfurnished Plate & Yokes - 12 Apertures - Polar™

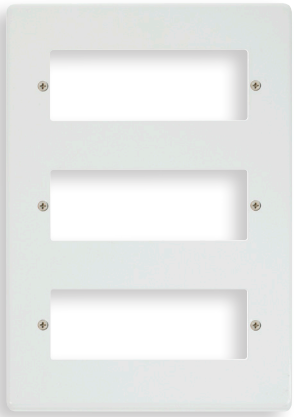

618

**3 Tier Unfurnished Plates - MiniGrid®**

**PRW618** 3 Tier MiniGrid® Unfurnished Plate & Yokes - 18 Apertures - Polar™

Switch modules interchangeable with MiniGrid® Modules in Polar White (PW) finish. For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page K18.

**MINIGRID®**

If dimmer modules are to be mounted directly above each other, the MD9014 (page K37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page K21) can be used in conjunction with Click Smart+ dimming receivers (page B22).

Standards: BS 5733  
Back Box Depth (mm): 47  
Dimensions (mm): 612: 146 (W) x 153 (H) x 9.5 (D) 618: 146 (W) x 214 (H) x 9.5 (D)



**MINIGRID®**

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.



WA512

WA518

**Galvanised Steel Back Boxes**

**WA512** 2 Tier 47mm Deep K.O. Box  
**WA518** 3 Tier 47mm Deep K.O. Box

Standards: BS 4662  
Dimensions (mm): WA512: 137 (W) x 137 (H) x 47 (D) WA518: 137 (W) x 197 (H) x 47 (D)



161



162



163



164

**Dimmer Switches (Trailing Edge)**

- PRW161** 1 Gang 2 Way 100W Dimmer Switch
- PRW162** 2 Gang 2 Way 100W Dimmer Switch
- PRW163** 3 Gang 2 Way 100W Dimmer Switch
- PRW164** 4 Gang 2 Way 100W Dimmer Switch

We recommend the use of branded LED lamps with all Polar™ trailing edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. For further information please contact Click® Technical support team.

**Standards:** BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2  
**Type:** Trailing Edge  
**Back Box Depth (mm):** 25  
**Cable Size (mm<sup>2</sup>):** 2 x 1.5  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)

**Dimmer Modules**

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

**Dimmer M10 Nut Runner**

- SP900** Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate




SP900


MD9014




145PL



146PL

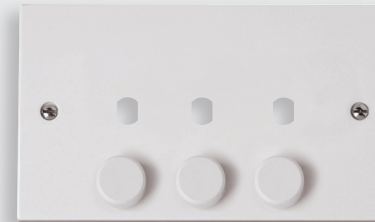

147PL

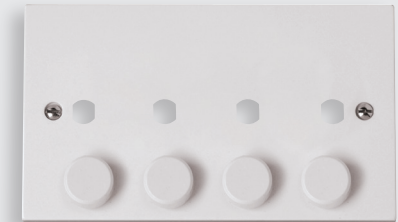

148PL

**Dimmer Mounting Unfurnished Plates**

- PRW145PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
  - PRW146PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
  - PRW147PL** 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
  - PRW148PL** 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- The dimmer modules are supplied separately to the plates listed above.

**Standards:** BS 5733  
**Back Box Depth (mm):** 25 (35 Flat Plate)  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)



# Power Socket Outlets, Fused Connection Units & Control Switches

All socket outlets are tested and approved to BS1363. Socket outlets are available with single or double pole switches. Twin earth terminals are available on 1 and 2 gang socket outlets in order to comply with regulation 607 of BS7671 IEE Wiring Regulations. As with the plate switches, the actual switch rocker features a gentle curved appearance.

## Power Socket Outlets



H13



BA037


BA038

### Round Pin Socket Outlets

- PRW034 15A Switched Round Pin Socket
- PRW038 5A Round Pin Socket
- PRW039 2A Round Pin Socket

### Unswitched European Socket Outlets

- BA037PW 16A Single European Socket
- BA038PW 16A Twin European Socket




034



038



039

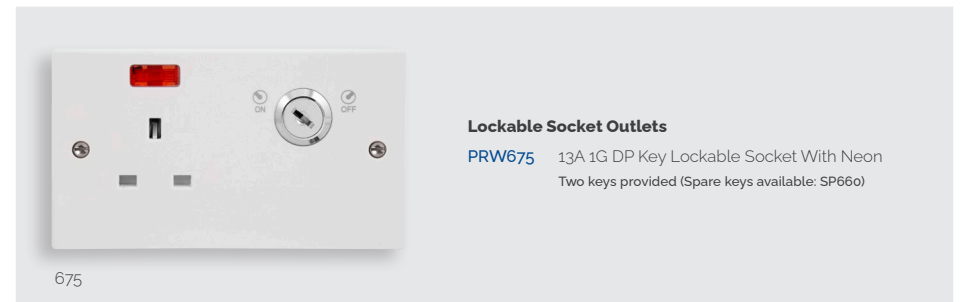

675

### Lockable Socket Outlets

- PRW675 13A 1G DP Key Lockable Socket With Neon  
Two keys provided (Spare keys available: SP660)

**Standards:** BS 1363-2034 038 039: BS 546 675: BS EN 60669-1 BS 1363-2 BA037 BA038: IEC 60884  
**Back Box Depth (mm):** 25 675: 35 BA037 BA038: 47  
**Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4 034: 3 x 2.5 038: 4 x 1.5 or 3 x 2.5 039: 3 x 1.5  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)






**Switched Socket Outlets**

- PRW035** 13A 1 Gang DP Switched Socket
- PRW036** 13A 2 Gang DP Switched Socket (Twin Earth)
- PRW037** 13A 2 Gang DP Switched Clean Earth Socket
- PRW605** 13A 1 Gang Switched Socket
- PRW606** 13A 2 Gang Switched Socket
- PRW635** 13A 1 Gang DP Switched Socket With Twin Earth Terminals

035 | 605 | 635

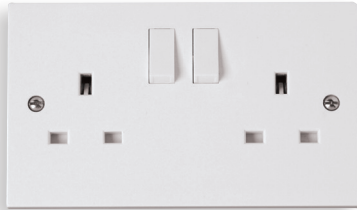

**Switched Safety Shutter Socket Outlets**

Safety Shuttered sockets listed are only available for sale in the Republic of Ireland.

- PRW1035** 13A 1 Gang DP Switched Socket
- PRW1036** 13A 2 Gang DP Switched Socket (Twin Earth)
- PRW1037** 13A 2 Gang DP Switched Clean Earth Socket
- PRW1635** 13A 1 Gang DP Switched Socket (Twin Earth)

036 | 606



030 | 630

032

030EX

**Unswitched Socket Outlets**

- PRW030** 13A 1 Gang Unswitched Socket
- PRW032** 13A 2 Gang Unswitched Socket
- PRW030EX** 13A 1 Gang Unswitched Socket - Printed 'Not To Be Used For Outdoor Appliances'
- PRW630** 13A 1 Gang Unswitched Socket With Twin Earth Terminals


**Standards:** BS 1363-2 **Back Box Depth (mm):** 25  
**Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)



771U



785

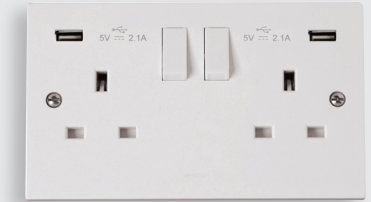

780



770




786

**Switched Sockets With USB Outlets**

- PRW771U** 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- PRW770** 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- PRW780** 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
- PRW785** 13A 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
- PRW786** 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)


**Standards:** BS 1363-2 BS 1363-2: 2016 •A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1  
**Back Box Depth (mm):** 25 **Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)



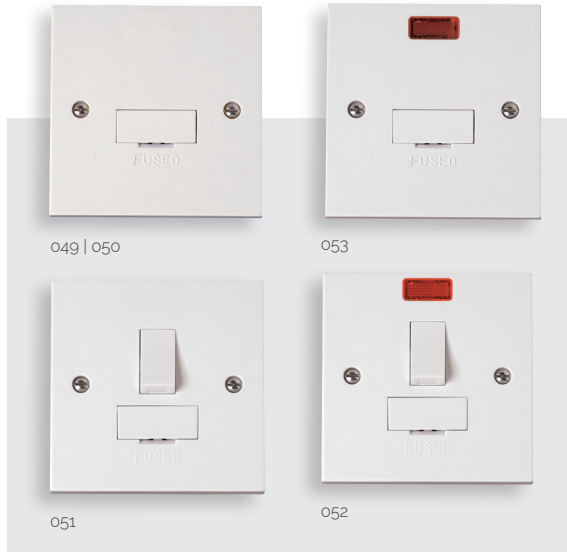

**Fused Connection Units With Optional Flex Outlet**


- PRW049** 3A Fused Connection Unit
- PRW050** 13A Fused Connection Unit
- PRW051** 13A Switched Fused Connection Unit
- PRW052** 13A Switched Fused Connection Unit With Neon
- PRW053** 13A Fused Connection Unit With Neon

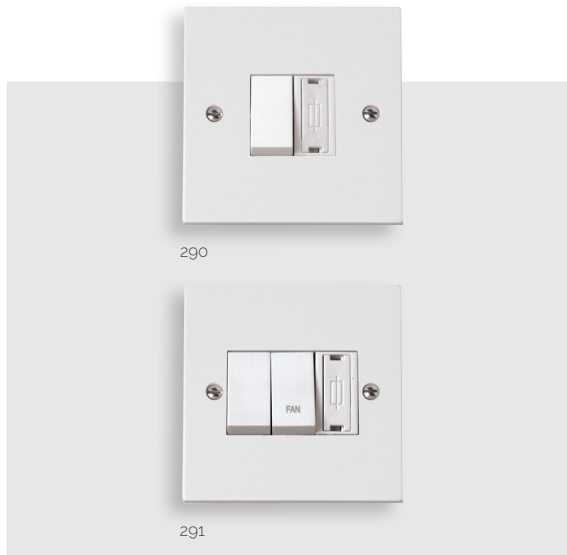

**Fused Control Switch Plates**

- PRW290** 3A FCU With DP Switch (Linked)
- PRW291** 3A FCU With DP Switch & DP Fan Switch (Linked)

**Standards:** BS 1363-4 BS 1362 **290 291:** BS EN 60669-1 BS 5733  
**Back Box Depth (mm):** 25 **290 291:** 16  
**Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4 **049:** 4 x 2.5 or 2 x 4 **290 291:** 4 x 1.5 or 2 x 2.5  
**Dimensions (mm):** 86 (W) x 86 (H) x 11 (D)

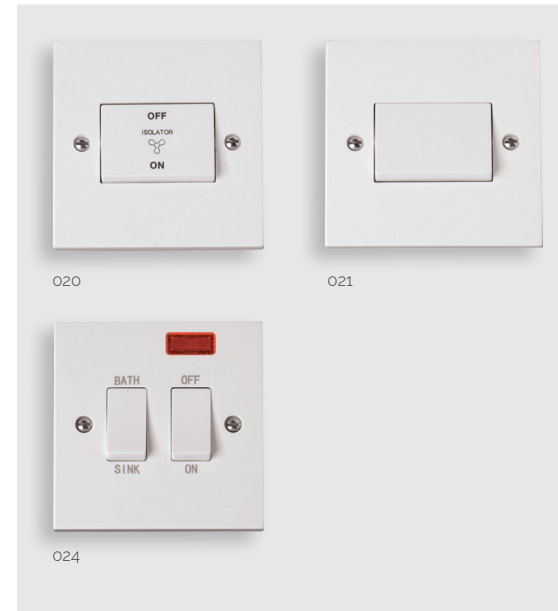


**Fan Isolation Switch**

- PRW020** 10A 3 Pole Fan Isolation Switch
- PRW021** 10A 3 Pole Isolation Switch

**20A DP Sink/Bath Switch**

- PRW024** 20A DP Sink/Bath Switch With Neon

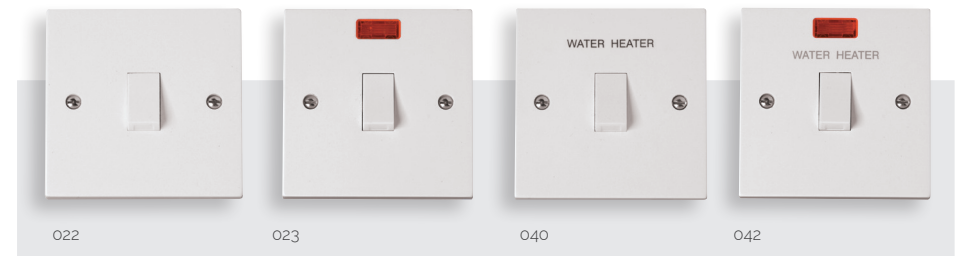

**20A Control Switches with Optional Flex Outlet**

- PRW022** 20A DP Switch
- PRW023** 20A DP Switch With Neon
- PRW040** 20A DP 'Water Heater' Switch
- PRW042** 20A DP 'Water Heater' Switch With Neon

**Standards:** BS EN 60669-1 **675:** BS 1363-2 **020 021:** BS EN 60669-2-4 BS EN 60669-1  
**Back Box Depth (mm):** 25 **660 675:** 35  
**Cable Size (mm<sup>2</sup>):** 3 x 2.5 **660 675:** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D)



660


**Lockable Switch**

- PRW660** 20A Double Pole Key Lockable Switch  
Two keys provided (Spare keys available: SP660)




200

201

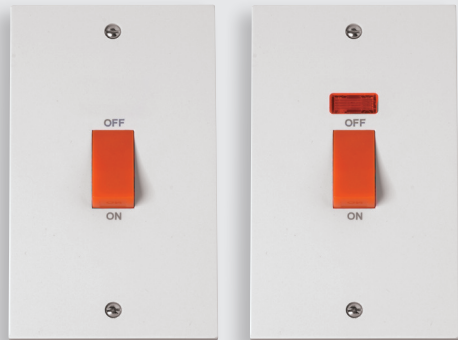


202

203

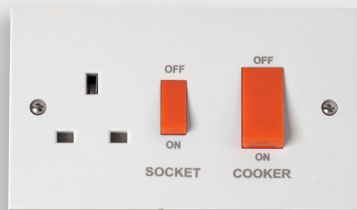

204

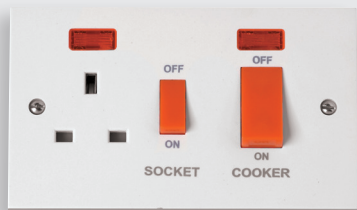

205



**45A Switches And Socket Outlets**


- PRW200** 45A 1 Gang DP Switch
- PRW201** 45A 1 Gang DP Switch With Neon
- PRW202** 45A 2 Gang DP Switch
- PRW203** 45A 2 Gang DP Switch With Neon
- PRW204** 45A 2 Gang DP Switch With 13A DP Switched Socket
- PRW205** 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

**Standards:** BS EN 60669-1 204 205: BS 4177  
**Back Box Depth (mm):** 35  
**Cable Size (mm<sup>2</sup>):** 1 x 16  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D) 202 203: 86 (W) x 146 (H) x 11 (D)




500

501

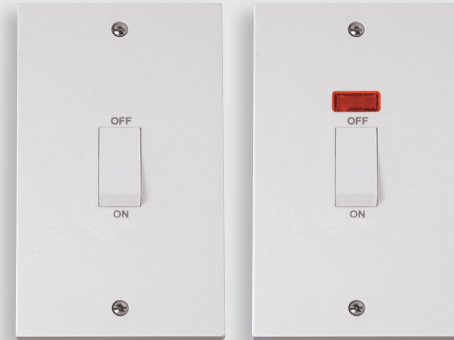


502


503

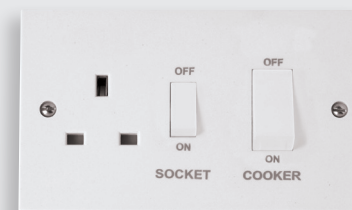

504

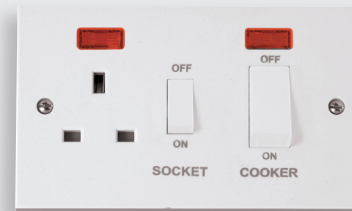

505

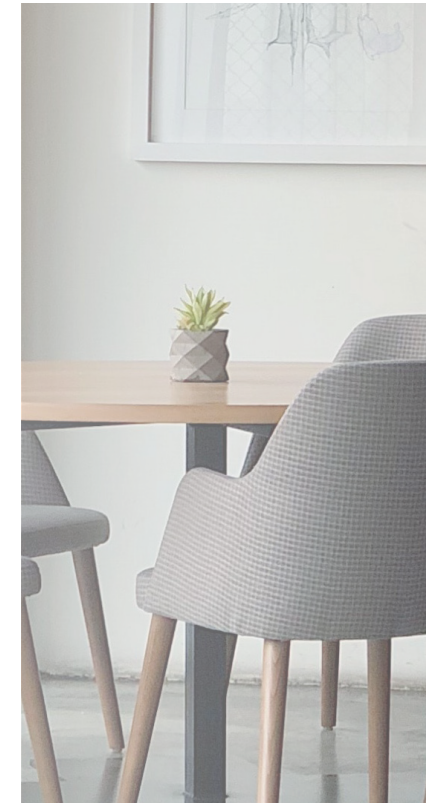

**45A Switches And Socket Outlets With White Rockers**

- PRW500** 45A 1 Gang DP Switch With White Rocker
- PRW501** 45A 1 Gang DP Switch With White Rocker & Neon
- PRW502** 45A 2 Gang DP Switch With White Rocker
- PRW503** 45A 2 Gang DP Switch With White Rocker & Neon
- PRW504** 45A 2 Gang DP Switch With 13A DP Switched Socket & White Rockers
- PRW505** 45A 2 Gang DP Switch With 13A DP Switched Socket, White Rockers & Neons

**Standards:** BS EN 60669-1 504 505: BS 4177  
**Back Box Depth (mm):** 35  
**Cable Size (mm<sup>2</sup>):** 1 x 16  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D) 502 503: 86 (W) x 146 (H) x 11 (D)



essentials™ Decorative covers available for PRC210, see Essentials™ page N38.

**10AX & 16A Pull Cord Switches**

- PRC009** 10AX 2 Way Ceiling Pull Cord Switch
- PRC210** 10AX 2 Way Pull Cord Switch
- PRC216** 16A DP Pull Cord Switch With Neon

**45A & 50A Pull Cord Switches**

- PRW210** 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
- PRW211** 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
- PRW213** 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress

**Fan Isolation Pull Cord Switches**

- PRW208** 10A 3 Pole Fan Isolation Pull Cord Switch

Suffix RD (Red cord & bangle) or AG (Anthracite Grey cord & bangle) to the above codes for product to be supplied with required cord and bangle. Example: A 10AX 2 Say Pull-cord Switch with red cord and bangle will become product code PRC210RD.

**Standards:** BS EN 60669-1 **Backbox:** 211: 47 208: 25 210: 35  
**Cable Size (mm<sup>2</sup>):** 2 x 1.5 or 1 x 2.5 210: 1 x 6 211 213: 1 x 2.5  
**Dimensions (mm):** 86 (W) x 86 (H) x 43 (D) 009: 76 (Dia) x 51.5 210 216: 70 (Dia) x 42 (D) PRW213: 100 (Dia) x 77 (D)



**45A Cooker Connection Plates**

- PRW215** 45A 1 Gang Cooker Connection Plate  
UK Design Registration No. 3015175

**45A Cooker Outlet Plates**

- PRW217** 45A Easyfit Dual Appliance Outlet Plate  
UK Design Registration No. 3015175  
Utilises standard 1 gang back box 25mm deep minimum.

**Pattress Box for PRW217 - Urea**


- PRW218** 35mm Deep Pattress Box For Use With PRW217



**Standards:** BS 5733  
**Back Box Depth (mm):** 215: 35 217: 25 **Cable Size (mm<sup>2</sup>):** 215: 2 x 10 217: 1 x 10  
**Dimensions (mm):** 215: 86 (W) x 86 (H) x 22.5 (D) 217: 85 (W) x 130 (H) x 27 (D) 218: 85 (W) x 130 (H) x 37.5 (D)



H22

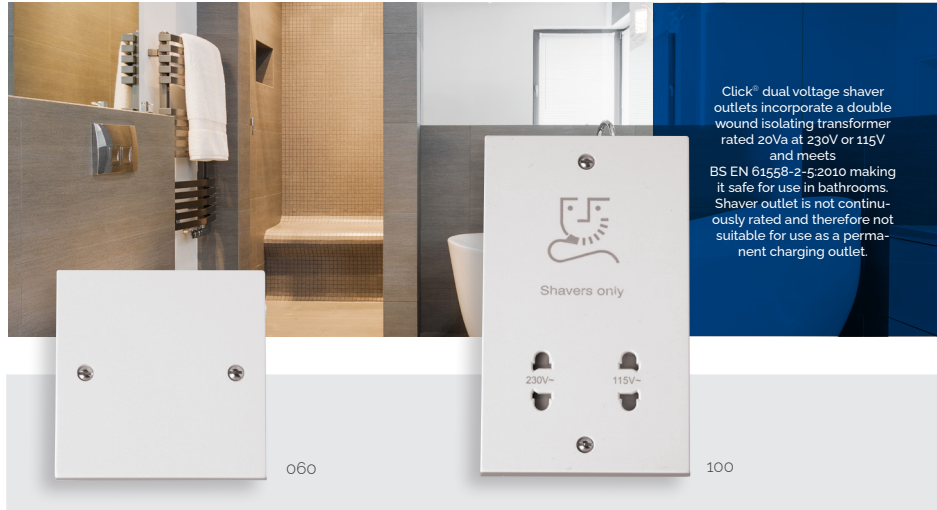


Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

**Blank Plates**

- PRW060 1 Gang Blank Plate
- PRW061 2 Gang Blank Plate

**Dual Voltage Shaver Socket Outlet**

- PRW100 115/230V Dual Voltage Shaver Socket

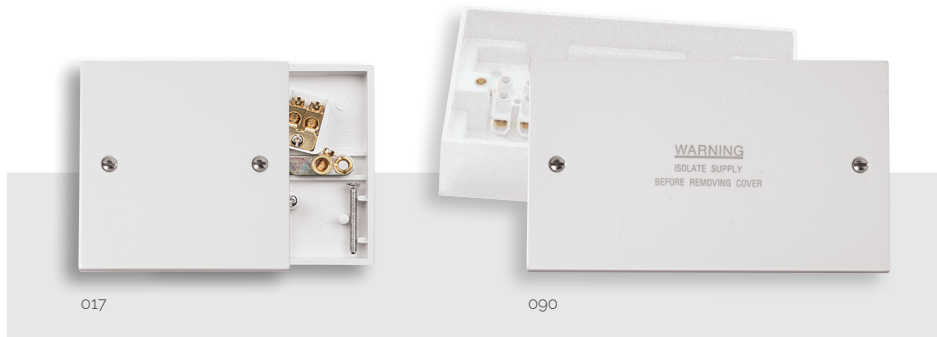

**Flex Outlet Plates**

- PRW017 20A Flex Outlet Plate

**Connector Box**

- PRW090 15A 10 Way Surface Connector Box (for use with central heating installations)

**Standards:** BS 5733 090: BS 4662 100: BS EN IEC 61558-1 BS EN 61558-2-5  
**Back Box Depth (mm):** 16 090: 25 100: 47  
**Cable Size (mm<sup>2</sup>):** 017: 3 x 2.5 or 2 x 4 090: 2 x 1.5 or 1 x 2.5 100: 2 x 1.5 or 1 x 2.5  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D) 090: 147 (W) x 87 (H) x 41 (D)  
 100: 86 (W) x 146 (H) x 11 (D)



TV & Telephone Sockets

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.

This section is devoted to the New Media™ range of plate accessories which includes products for connecting telephone, computer, television and satellite devices.





**RJ11 Telephone Outlet - PC**

**PRW115** Single RJ11 (Irish/US) Outlet



119 | 124



122 | 127

Twin outlets are 2 separate sockets and not internally linked together.

**Telephone Outlets - Urea**


**PRW119** Single Telephone Outlet - Master

**PRW122** Twin Telephone Outlet - Master

**PRW124** Single Telephone Outlet - Secondary

**PRW127** Twin Telephone Outlet - Secondary

**Back Box Depth (mm):** 16 **115:** 35  
**Termination Type:** IDC **115:** Screw  
**Dimensions (mm):** **115:** 86 (W) x 86 (H) x 11 (D) **Urea:** 86 (W) x 86 (H) x 11 (D)

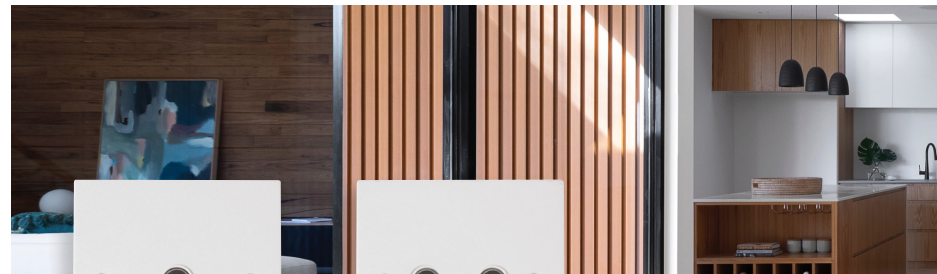

065



066

**Non-isolated Coaxial Outlets (Unshielded)**

**PRW065** Single Coaxial Outlet

**PRW066** Twin Coaxial Outlet



158



159

**Isolated Coaxial Outlets (Unshielded)**

**PRW158** Single Isolated Coaxial Outlet

**PRW159** Twin Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.



156



170



157

**Satellite Outlets (Unshielded)**

**PRW156** Non-isolated Single Satellite Outlet

**PRW170** Non-isolated Satellite & Non-isolated Coaxial Outlet

**PRW157** Isolated Satellite & Isolated Coaxial Outlet

**Back Box Depth (mm):** 16  
**Dimensions (mm):** **1 Gang:** 86 (W) x 86 (H) x 11 (D)



**new media™** For a complete range of New Media™ modules please see the New Media™ section of this catalogue.

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

All New Media™ plates are suitable for use with standard euro module inserts.

**Unfurnished Plates - New Media™**

- PRW310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- PRW311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- PRW312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

**Standards:** BS 5733  
**Back Box Depth (mm):** Dependent On Modules Fitted  
**Dimensions (mm):** 1 Gang: 86 (W) x 86 (H) x 11 (D) 2 Gang: 146 (W) x 86 (H) x 11 (D)



**Moulded Pattress Boxes**

- PRW080** 1 Gang 16mm Deep Pattress Box With Earth Terminal
- PRW081** 1 Gang 25mm Deep Pattress Box
- PRW082** 2 Gang 25mm Deep Pattress Box
- PRW083** 1 Gang 35mm Deep Pattress Box
- PRW084** 2 Gang 35mm Deep Pattress Box
- PRW085** 1 Gang 47mm Deep Pattress Box With Earth Terminal
- PRW086** 2 Gang 47mm Deep Pattress Box Fitted With Cable Restraint & Earth Terminal
- PRW089** Dual Accessory 29mm Deep Pattress Box With Earth Terminal

**Converter Pattress Box**

- PRW091** 1 Gang To 2 Gang 16mm Deep Converter Pattress

**Architrave Pattress Boxes**

- PRW175** 1 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
- PRW176** 2 Gang 19mm Deep Architrave Pattress Box with Earth Terminal  
For Polar™ products only


**PVC Pattress Boxes**

- PRW230** 1 Gang 29mm Deep PVC Pattress Box - Trunking
- PRW240** 1 Gang 29mm Deep PVC Pattress Box - Conduit
- PRW235** 2 Gang 29mm Deep PVC Pattress Box - Trunking
- PRW245** 2 Gang 29mm Deep PVC Pattress Box - Conduit


essentials™ For the complete range of back boxes see Essentials™ page N4.



WA095



WA4247



WA107P



GA100

**Galvanised Steel Back Boxes**

- WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099 1 + 1 35mm Deep Dual Accessory Box
- WA102 1 + 2 35mm Deep Dual Accessory Box
- WA671 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
- WA672 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

**FlameGuard® Dry Lining Boxes**

- WA4135 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4235 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4247 2 Gang 47mm Deep FlameGuard® Dry Lining Box

**Dry Lining Boxes (Sprung Fixing Lugs)**

- WA087SF 1 Gang 35mm Deep Dry Lining Box
- WA088SF 2 Gang 35mm Deep Dry Lining Box
- WA106SF 1 Gang 47mm Deep Dry Lining Box
- WA107SF 2 Gang 47mm Deep Dry Lining Box

**Dry Lining Boxes**

- WA087P 1 Gang 35mm Deep Dry Lining Box
- WA088P 2 Gang 35mm Deep Dry Lining Box
- WA106P 1 Gang 47mm Deep Dry Lining Box
- WA107P 2 Gang 47mm Deep Dry Lining Box
- WA108P Round Ceiling 34mm Deep Dry Lining Box

**Ezylink' Dry Lining Boxes**

- GA100 'Ezylink' Dry Lining Box Connector  
Suitable for use with WA087P, WA088P, WA106P & WA107P.

essentials™

For the complete range of back boxes see Essentials™ page N4.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the cabability of the boxes being mounted back to back.